


Tack Strip Specifications

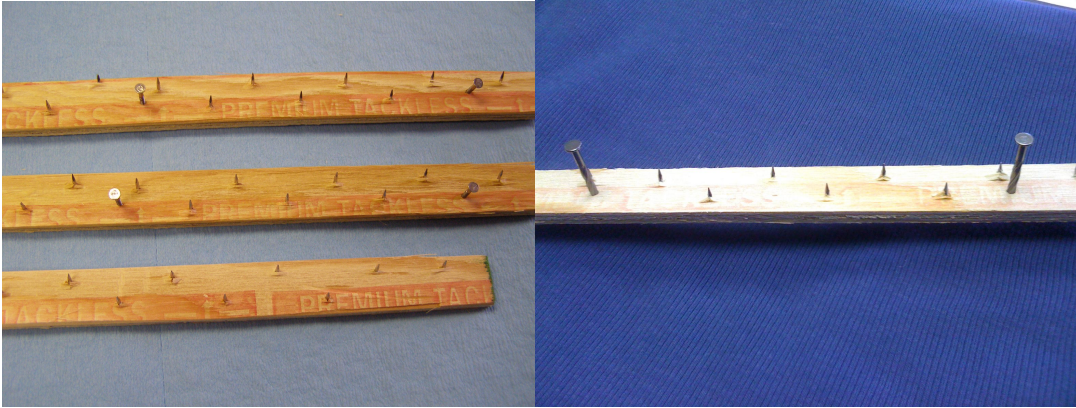

Brand Name: Baco

Specifications:

Plywood: Three (3) layers consisting of Douglas Fir, Sitka Spruce, Western Hemlock, Larch, White Western Pine or White Fir, touch sanded to 9/32" (.280 + or - .010).

Face panels to meet "C-Plugged" commercial standard specifications.

Nails: Pin: Rust resistant 15/32" x 16½ gauge x 1/8" head.

Ringshank (For wood floors): ¾" x 14 ½ gauge x 3/16" head.

Concrete (For concrete floors): Hardened steel 11/16" x 12 gauge x 7/32" head.

Acoustical (For light-weight aggregate concrete flooring designed for absorbing sound): 1 ¼" spiral hardened nail, spaced 5 5/8" apart.

Strips: Each strip consists of one (1) piece of plywood .886 x 9/32" x 48", bevel cut one side. 58 pin nails driven to ¼ pin height. 9 pre-nails.

Containers: Each box contains 400 lineal feet (100 pieces of 48" each) unless otherwise specified. Acoustical boxes contain 280 lineal feet.

Tack Strip is available in:

Standard (no pre-nails)

Pre-nailed wood (for use on wood floors)

Pre-nailed concrete (for use on concrete floors)

Acoustical (for use on sound-absorbing concrete floors)