


PRODUCT SPECIFICATIONS

6" x 48" Flexible Glue Down Planks (5.75" x 47.75" Clic)



12" x 24" Tiles (Flexible Glue Down Only)

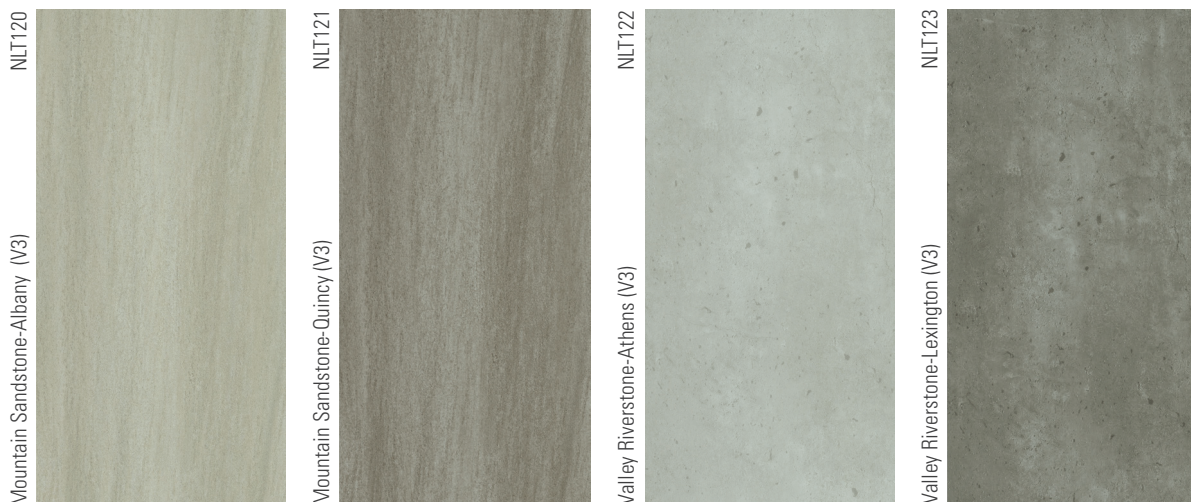

The Novalis® Appearance Variability Rating System: V1 = Appearance varies least from piece to piece. V4 = Appearance varies most from piece to piece.

PRODUCT SPECIFICATIONS

Specifications	Flexible Glue Down	HDC-Clic	Specifications	Flexible Glue Down	HDC-Clic
Overall Thickness	2.0mm	3.2mm	Tile Packaging (12" x 24")	24 pcs. (48 sq. ft.)	N/A
Wear Layer Thickness	0.15mm (6mil)	0.15mm (6mil)	Plank Packaging (6" x 48")	20 pcs. (40 sq. ft.)	N/A
Tile Size	12" x 24"	N/A	Plank Packaging (5.75" x 47.75")	N/A	12 pcs. (22.8 sq. ft.)
Plank Size	6" x 48"	5.75" x 47.75"	Tile Cartons/Pallet (12" x 24")	48	N/A
Urethane Protective Coating	Yes	Yes	Plank Cartons/Pallet (6" x 48")	55	N/A
Edge and Grout Effect	MBV	MBV	Plank Cartons/Pallet (5.75" x 47.75")	N/A	60
FloorScore®	Yes	Yes	Tile Weight/Carton (12" x 24")	37.03	N/A
Residential Warranty	15-Year	15-Year	Plank Weight/Cartons (6" x 48")	31.02	N/A
Light Commercial Warranty	5-Year	5-Year	Plank Weight/Cartons (5.75" x 47.75")	N/A	29.98


Lyndon™ 2.0mm/6mil

ASTM F1700	Standard Specification for Solid Vinyl Tile	Class III, Type B
ASTM F137	Flexibility	Passes
ASTM F386	Thickness Product	Passes
ASTM F410	Wear Layer Thickness	6 mil
ASTM F925	Chemical Resistance	Excellent
ASTM F1514	Resistance to Heat	Excellent
ASTM F1515	Resistance to Light	Excellent
ASTM F1914	Residual Indentation	Passes
ASTM F2055/F2421	Squareness and Size	Passes
ASTM F2199	Dimensional Stability	Passes
ASTM E648	Fire Resistance	Class 1
ASTM E662	Smoke Generation	Passes < 450
ASTM F970	Static Load Limit	0.000" @ 250 psi
Static Load (Modified)		0.005" @ 1,400 psi


Lyndon™ HDC 3.2mm/6mil

F3261	Standard Specification for Resilient Flooring in Modular Format with Rigid Polymeric Core	Class 1, Type B, Backing Class B
ASTM F387	Thickness w/o foam backing	Passes
ASTM F410	Wear Layer Thickness	6 mil
ASTM F925	Chemical Resistance	Excellent
ASTM F1514	Resistance to Heat	Excellent
ASTM F1515	Resistance to Light	Excellent
ASTM F1914	Residual Indentation	Excellent
ASTM F1914	Puncture	No Puncture
ASTM F2055/F2421	Squareness and Size	Passes
ISO 24337	Determination of Geometrical Characteristics¹	Passes
ISO 23999	Dimensional Stability after Exposure to Heat	Passes
ISO 23999	Curl after Exposure to Heat	Passes
ASTM E648	Fire Resistance	Class 1
ASTM E662	Smoke Generation	Passes < 450
ASTM F970	Static Load Limit	0.000" @ 250 psi
Static Load (Modified)		0.003" @ 1200 psi

¹Geometrical Characteristics are defined as plank size, flatness, opening and ledging

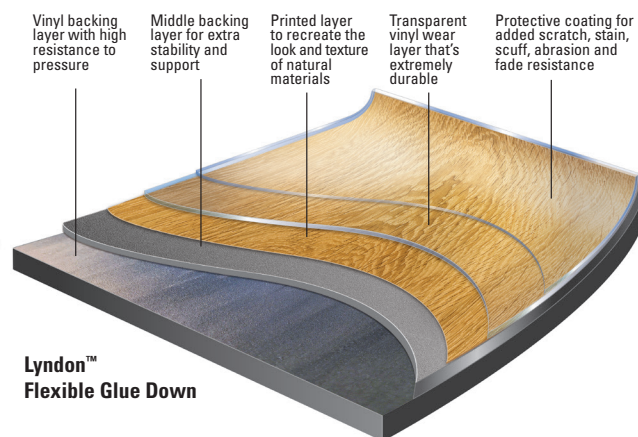

**Lyndon™
Flexible Glue Down**

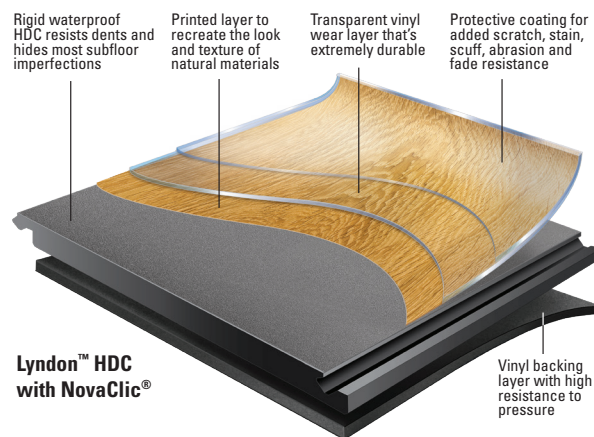

**Lyndon™ HDC
with NovaClic®**

LYNDON™ IS MADE TO THE HIGHEST ENVIRONMENTAL STANDARDS BY NOVALIS® INNOVATIVE FLOORING

